


ALLOWANCE	
UNDER	± 0.1
3 TO 6	± 0.15
6 TO 15	± 0.2
15 TO 50	± 0.25
50 OVER	± 0.3

SCHEMATIC

Specifications:
 Rating :DC 50V, 1A.
 Force:5-40N.
 Contact resistance:
 Less than30mΩ.
 Insulation resistance:
 Over 100MΩ on DC 500V measured.
 Voltage withstand :
 AC 500V, For 1 minute. 9-2.5X0.8

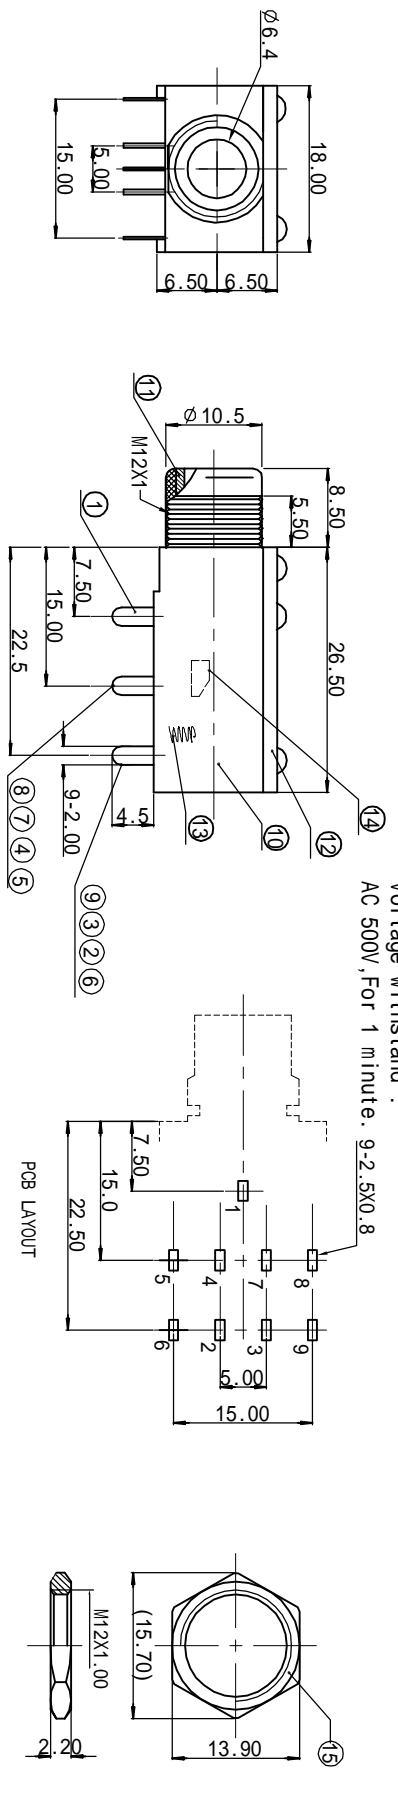

11	SOCKET	BRASS	1	NI PLATED					
10	HOUSE	ABS 94HB	1	BLACK					
9	TERMINAL-9	BRONZE t=0.25	1	Ag PLATED	16	WASHER	SPCC &±0.5	1	NI PLATED
8	TERMINAL-8	BRONZE t=0.3	1	Ag PLATED	15	SCREW	BRASS	1	NI PLATED
7	TERMINAL-7	BRASS t=0.5	1	Ag PLATED	14	SLIPPERY PIECE	POM	2	BLACK
6	TERMINAL-6	BRONZE t=0.25	1	Ag PLATED	13	SPRING	Z2A	1	NI PLATED
5	TERMINAL-5	BRONZE t=0.3	1	Ag PLATED	12	COVER	PC	1	BLACK
4	TERMINAL-4	BRASS t=0.5	1	Ag PLATED	MODEL NO :SJ-6310				
3	TERMINAL-3	BRONZE t=0.25	1	Ag PLATED	TYPE: 6.35 PHONE JACK				
2	TERMINAL-2	BRONZE t=0.25	1	Ag PLATED	MATERIAL NO :				
1	TERMINAL-1	BRONZE t=0.25	1	Ag PLATED	PROJECTION				
NO:	PART NAME	MATERIAL	QTY	FINISHING	ZHENGWEI INDUSTRY (HK) CO., LIMITED				